

BID SOLICITATION



STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS
CAPITOL HILL
PROVIDENCE RI 02908

BUYER: LISA HILL
PHONE #: (401) 222 - 2142 ext. 116

**B
I
L
L
T
O**
TRANSPORTATION
DOT MAINTENANCE BUSINESS OFFICE
360 LINCOLN AVE
WARWICK RI 02888

BID NUMBER: B06198

TITLE: UTILITY BODY TRUCK

BID OPENING DATE AND TIME:

04/25/2006 11:00 AM

**S
H
I
P
T
O**
TRANSPORTATION
DOT MAINTENANCE DIVISION
MAIN OFFICE
360 LINCOLN AVE
WARWICK RI 02888

Requisition Number(s): R70B067186

Item	Class-Item	Quantity	Unit	Unit Price	Total
	<p>THE FOLLOWING ADDITIONAL TERMS AND CONDITIONS APPLY TO THIS INVITATION FOR BIDS:</p> <ol style="list-style-type: none">1. ALL VEHICLES MUST BE DELIVERED WITHOUT DEALER'S NAME OR ADVERTISING OF ANY TYPE VISIBLE ON THE BODY.2. EACH VEHICLE DELIVERED TO THE STATE MUST BE ACCOMPANIED BY A "CERTIFICATE OF ORIGIN" CONTAINING THE MANUFACTURER'S VEHICLE IDENTIFICATION NUMBER (VIN), THE NUMBER OF ENGINE CYLINDERS AND ENGINE TYPE, A GENERAL DESCRIPTION OF THE BODY, AND THE MODEL NAME OR NUMBER. CERTIFICATE OF ORIGIN MUST BE ASSIGNED TO STATE OF RI/FLEET OPERATIONS, ONE CAPITOL HILL, PROVIDENCE, RI 02908, UNLESS THE VEHICLE IS BEING PURCHASED BY THE RHODE ISLAND STATE POLICE. IF SO, CERTIFICATE OF ORIGIN MUST BE ASSIGNED TO RHODE ISLAND STATE POLICE, 311 DANIELSON PIKE, NORTH SCITUATE, RI 02857.3. BIDS MUST BE PREDICATED ON THE BASIS OF THE BIDDER'S FULL AND UNENCUMBERED TITLE TO THE VEHICLE(S) AS OF THE DATE OF DELIVERY TO THE STATE. BIDS SUBJECT TO LIEN OR ASSIGNMENT AT THE TIME OF DELIVERY TO THE STATE, OR WHICH STIPULATE THIRD PARTY OR JOINT PAYMENT, WILL BE REJECTED.4. TITLE CERTIFICATES MUST BE PROVIDED AT THE TIME OF DELIVERY TO THE STATE.5. WHERE THE FIRM SUBMITTING THE BID IS ACTING AS AN AGENT FOR ANOTHER CORPORATE ENTITY, (SPECIFICALLY WITH RESPECT TO LEASE ARRANGEMENTS), THE BID MUST IDENTIFY THE CORPORATION WHO WILL BE NAMED IN ANY SUBSEQUENT AWARD AS THE BIDDER OF RECORD.6. UNLESS OTHERWISE INDICATED, ALL VEHICLES WILL BE DELIVERED TO STATE FLEET OPERATIONS AT ONE CAPITOL HILL, PROVIDENCE, R.I.				

It is the Vendor's responsibility to check and download any and all addenda from the RIVIP. This offer may not be considered unless a signed RIVIP generated Bidder Certification Cover Form is attached and the Unit Price column is completed. The signed Certification Cover Form must be attached to the front of the offer. When delivering offers in person to One Capitol Hill, vendors are advised to allow at least one hour additional time for clearance through security checkpoints.

DELIVERY: _____

RIVIP VENDOR ID#: _____

TERMS OF PAYMENT: _____

**DO NOT SIGN BID ON THIS PAGE!
USE CERTIFICATION COVER FORM.**

BID SOLICITATION



STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS
CAPITOL HILL
PROVIDENCE RI 02908

BUYER: LISA HILL
PHONE #: (401) 222 - 2142 ext. 116

**B
I
L
L
T
O**
TRANSPORTATION
DOT MAINTENANCE BUSINESS OFFICE
360 LINCOLN AVE
WARWICK RI 02888

BID NUMBER: B06198

TITLE: UTILITY BODY TRUCK

BID OPENING DATE AND TIME:

04/25/2006 11:00 AM

**S
H
I
P
T
O**
TRANSPORTATION
DOT MAINTENANCE DIVISION
MAIN OFFICE
360 LINCOLN AVE
WARWICK RI 02888

Requisition Number(s): R70B067186

Item	Class-Item	Quantity	Unit	Unit Price	Total
1.0	<p>THE STATE OF RHODE ISLAND RESERVES THE RIGHT TO MANDATE THE REPLACEMENT OF ALL VEHICLES IN ACCORDANCE WITH RHODE ISLAND STATE LEMON LAW 31-5.2-1 TO 31-5.2-13. REPLACEMENT EQUIPMENT MUST BE OF LIKE OR SUPERIOR SPECIFICATIONS TO THE VEHICLE IN QUESTION. COSTS ASSOCIATED WITH THE REMOVAL OF PROBLEMATIC EQUIPMENT AND DELIVERY AND INSTALLATION OF REPLACEMENT EQUIPMENT WILL BE SOLELY AT THE VENDOR'S EXPENSE.</p> <p>070-06 NEW NEWEST MODEL 4X2 SUPER CAB. CAB & CHASSIS 162" WHEEL BASE WITH STAHL GCX 113" LOW PROFILE UTILITY BODY, PER ATTACHED SPECIFICATIONS.</p> <p>TO INCLUDE 7 PRONG TRAILER OUTLET AND WHELAN LIGHT BAR, PER ATTACHED SPECIFICATIONS. TRAILER PLUG TO BE WIRED TO D.O.T. SPECIFICATIONS ATTACHED.</p> <p>YEAR _____</p> <p>MAKE _____</p> <p>MODEL _____</p> <p>BODY _____</p> <p>MSRP _____</p> <p>ANTICIPATED DELIVERY _____</p>	3.00	EA		

It is the Vendor's responsibility to check and download any and all addenda from the RIVIP. This offer may not be considered unless a signed RIVIP generated Bidder Certification Cover Form is attached and the Unit Price column is completed. The signed Certification Cover Form must be attached to the front of the offer. When delivering offers in person to One Capitol Hill, vendors are advised to allow at least one hour additional time for clearance through security checkpoints.

DELIVERY: _____

RIVIP VENDOR ID#: _____

TERMS OF PAYMENT: _____

**DO NOT SIGN BID ON THIS PAGE!
USE CERTIFICATION COVER FORM.**

BID SOLICITATION



STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS
CAPITOL HILL
PROVIDENCE RI 02908

BUYER: LISA HILL
PHONE #: (401) 222 - 2142 ext. 116

**B
I
L
L
T
O**
TRANSPORTATION
DOT MAINTENANCE BUSINESS OFFICE
360 LINCOLN AVE
WARWICK RI 02888

BID NUMBER: B06198

TITLE: UTILITY BODY TRUCK

BID OPENING DATE AND TIME:

04/25/2006 11:00 AM

**S
H
I
P
T
O**
TRANSPORTATION
DOT MAINTENANCE DIVISION
MAIN OFFICE
360 LINCOLN AVE
WARWICK RI 02888

Requisition Number(s): R70B067186

Item	Class-Item	Quantity	Unit	Unit Price	Total
	<p>A COPY OF THE BID SPECIFICATIONS MUST BE RETURNED WITH THE BID AND MUST INDICATE COMPLIANCE OR EXCEPTION TO EACH ASPECT OF THE SPECIFICATION. ALL EXCEPTIONS MUST BE SPECIFICALLY IDENTIFIED.</p> <p>BIDDER MUST BE AN AUTHORIZED MANUFACTURER'S REPRESENTATIVE/DEALER.</p> <p>BIDDER MUST SUBMIT A DETAILED SPECIFICATION OF THE MODEL OFFERED INCLUDING VEHICLE CONFIRMATION.</p> <p>BIDDERS LOCATED BEYOND A 75 MILE RADIUS OF THE DELIVERY DESTINATION MUST INCLUDE A WRITTEN PLAN FOR DELIVERY. VEHICLES WILL ODOMETER READING IN EXCESS OF 75 MILES WILL NOT BE ACCEPTED WITHOUT PRIOR APPROVAL FROM THE DIVISION OF PURCHASES.</p> <p>THE STATE OF RHODE ISLAND RESERVES THE RIGHT TO MANDATE THE REPLACEMENT OF ALL VEHICLES IN ACCORDANCE WITH RHODE ISLAND STATE LEMON LAW 31-5.2-1 TO 31-5.2-13. REPLACEMENT EQUIPMENT MUST BE OF LIKE OR SUPERIOR SPECIFICATIONS TO THE VEHICLE IN QUESTION. COSTS ASSOCIATED WITH THE REMOVAL OF PROBLEMATIC EQUIPMENT AND THE DELIVERY AND INSTALLATION OF REPLACEMENT EQUIPMENT WILL BE SOLELY AT THE VENDOR'S EXPENSE.</p>				
				TOTAL:	

It is the Vendor's responsibility to check and download any and all addenda from the RIVIP. This offer may not be considered unless a signed RIVIP generated Bidder Certification Cover Form is attached and the Unit Price column is completed. The signed Certification Cover Form must be attached to the front of the offer. When delivering offers in person to One Capitol Hill, vendors are advised to allow at least one hour additional time for clearance through security checkpoints.

DELIVERY: _____

RIVIP VENDOR ID#: _____

TERMS OF PAYMENT: _____

**DO NOT SIGN BID ON THIS PAGE!
USE CERTIFICATION COVER FORM.**

STAHL UTILITY BODY TRUCK SPECIFICATIONS

Quantity: 3

Agency: RIDOT Highway & Bridge Maintenance

Contact Person: Paul Berthiaume

Telephone: (401) 222-6765 ext 4749

4 X 2 Supercab 162" Wheelbase

Powertrain

5.4L V-8 SOHC SMPI 24 valve engine with variable valve control *115 amp HD alternator *750 amp 78 amp hours (Ah) HD battery *5-speed electronic automatic transmission with overdrive, lock-up, driver selection * Rear-wheel drive * Limited slip differential * 4.10 axle ratio * Stainless steel exhaust.

Steering and Suspension

Hydraulic power-assist re-circulating ball steering *4 wheel disc brakes with front and rear vented discs * Firm ride suspension * Independent front suspension * Front anti-roll bar * HD front coil springs * HD front shocks * Rigid rear axle * Rear leaf suspension * Rear anti-roll bar * HD rear leaf springs * HD rear shocks * Front and rear 18.0" x 8.00" argent steel wheels with chrome hub covers * LT275/65SR18.0 BSW AS front and rear tires * Underbody w/crank down mounted full-size steel spare wheel.

Safety

4-wheel anti-lock braking system * Dual airbags, passenger side front-impact cancelable airbag * Front height adjustable seatbelts.

Comfort and Convenience

Air conditioning * AM/FM stereo, clock, seek-scan, 2 speakers, fixed antenna * 2-12V DC power outlets, ashtray, front lighter element(s) location * Analog instrumentation display includes tachometer, oil pressure gauge, engine temperature gauge, transmission fluid temp gauge, engine hour meter, trip odometer * Warning indicators include oil pressure, water temp warning, battery, key in ignition, low fuel, door ajar * Manual front windows vented rear windows with light tint * Variable intermittent front windshield wipers * Passenger side vanity mirror * Day-night rearview mirror * Interior lights include dome light with delay, front reading lights * Glove box, front cup holder, instrument panel bin, dashboard storage, rear door bins.

Seating and Interior

Seating capacity of 6 * Bench front seat with fixed head restraints * 60-40 folding rear split-bench seat with fold-up cushion * Vinyl faced front seats with vinyl back material * Vinyl faced rear seats with carpet back material * Full cloth headliner, full vinyl/rubber floor covering, plastic/rubber gear shift knob, cab back insulator.

Exterior Features

Side impact bars, front license plate bracket, fully galvanized steel body material * Black side window moldings, black front windshield molding, black rear window molding * Black door handles * Argent grille *

4 doors with reverse opening rear driver's side door, reverse opening rear passenger's side door * Trailer harness * Driver and passenger manual black folding outside mirrors * Front chrome bumper with front black rub strip, black bumper insert, front tow hooks * Aero-composite halogen headlamps * Additional exterior lights include cab clearance lights, under hood light * Clear coat monotone paint.

Warranty

Bumper to bumper	36 month/36,000 miles	Powertrain	36 month/36,000 miles
Corrosion Perforation...	60 month/unlimited mileage	Roadside Assistance.	36 month/36,000 miles

Dimensions and Capacities

Output	300 hp @ 5,000 rpm	Torque	365 lb. Ft. @ 3,750 rpm
1 st gear ratio	3.110	2 nd gear ratio	2.220
3 rd gear ratio	1.550	4 th gear ratio	1.000
5 th gear ratio	0.710	Reverse gear ratio	2.880
Curb weight	5,798 lbs.	GVWR	10,000 lbs.
Front GAWR	5,200 lbs.	Rear GAWR weight	6,830 lbs.
Payload	3,600 lbs.	Front curb weight	3,427 lbs.
Rear curb weight	2,371 lbs.	Front axle capacity	4,850 lbs.
Rear axle capacity	7,280 lbs.	Front spring rating	5,200 lbs.
Rear spring rating	6,830 lbs.	Front tire/wheel capacity	6,830 lbs.
Rear tire/wheel capacity	6,830 lbs.	Towing capacity	10,900 lbs.
Maximum GCWR	18,000 lbs.	5 th -wheel towing capacity	10,900 lbs.
Front legroom	41.0"	Rear legroom	32.2"
Front headroom	41.4"	Rear headroom	38.2"
Front hip room	67.4"	Rear hip room	67.3"
Front shoulder room	68.0"	Rear shoulder room	68.0"
Passenger area volume	115.4 cu.ft.	Length	246.6"
Body width	79.5"	Height	77.4"
Wheelbase	162.0"	Cab to axle	60.0"
Axle to end of frame	47.5"	Front tread	68.7"
Rear tread	68.1"	Turning radius	27.7"
Fuel tank	40.0 gal.		

Selected Options

Oxford White Clearcoat

Accessories and Aftermarket Options

Body by Stahl Truck Equipment

(See attached)

SPECIFICATIONS (STAHL)

Standard Construction:

- | | |
|-------------------------|--|
| ▪ Bulkhead (non-ribbed) | 14 gauge galvalneal steel |
| ▪ Bumper | 12 gauge galvalneal steel |
| ▪ Compartment Bottoms | 16 gauge galvalneal steel |
| ▪ Compartment Tops | 14 gauge galvalneal steel (one piece seamless design with load space inside centers) |

- Crossmember-front 10 gauge formed galvanized steel
- Crossmember-intermediate 12 gauge formed galvanized steel
- Crossmember-rear 10 gauge formed galvanized steel
- Doors High Impact ABS plastic outer panel with 16 gauge galvanized steel inner panel.
- End panels-front 14 gauge galvanized steel
- End panels-rear High Impact ABS plastic out panel with 16 gauge galvanized steel inner panel.
- Fender panels High Impact ABS plastic out panel with 16 gauge galvanized steel inner panel.
- Floor 12 gauge treadplate steel
- Intermediate panels 16 gauge galvanized steel
- Loadspace inside centers 14 gauge galvanized steel (one piece seamless design with compartment tops)
- Longitudinals 11 gauge formed galvanized steel
- Shelving 16 gauge high-spangle galvanized steel (250# capacity)
- Tailgate 16 gauge galvanized steel (double panel, formed construction)
- A-40 galvanized construction. Two-sided zinc-coated galvanized steel (0.40 oz. Zinc coating per square foot of steel) provides maximum rust and corrosion resistance.
- Body is constructed using engineered mechanical fasteners.

Standard Features/Equipment:

- High-styled body sides complement the chassis styling.
- Galvanized steel bumper is recessed, features non-skid step, and houses ID lights (over 80" bumpers), corner marker lights, license plate recess, and license plate lights.
- Vinyl coated aircraft cables on horizontal doors.
- Bolt-on door hinges are concealed to complement chassis styling and add security.
- Clip-on door seal (factory installed) allows easy removal for painting, replacement and quicker installation. Door seals against a flat surface for extra protection against water leakage.
- Concealed drip rail provides extra protection against water leakage.
- Fuel fill door is hinged automotive style.
- Cutout in intermediate panel between horizontal and rear vertical compartments provides extended storage from the horizontal compartment into the rear vertical compartment.
- Lights include stop, tail, turn, marker, and back up and complement the chassis styling.
- Lock cylinders are keyed alike with double-bitted keys.
- One-piece seamless compartment top and load space inside center.
- Primer is a high grade automotive type. Bodies are cleaned with a high-temperature, high-pressure chemical solution prior to prime painting.
- Rear vertical doors are rearward opening and open a full 90 degrees.
- Rotary door latches with stainless steel paddle handles and powder-coated steel pans. Latches are removable for ease of repair or replacement.
- Spring loaded vertical door holders hold door in open and closed positions.
- Door latch strikers are adjustable, bolt-on.
- Tailgate (two point slam-locking) is removable and features locking rotary latch and anti-rack/rattle hardware.
- Undercoating beneath floor and wheelwells.
- **STAHL's** exclusive 5-year "No Rust, No Bust" warranty.

Stahl Challenger GCXL by Stanley (Model Low Boy)

- 113” long (inside bed length to be 110”)
- 48”-1/2” floor width
- 14.5” compartment depth
- Dent resistant high impact ABS plastic outer panels – No Exceptions
- 16 gauge high-spangle galvanized steel (250# capacity) shelving
- A-40 galvanneal construction
- High-styled body sides complement the chassis styling
- Galvanneal steel bumper is recessed
- Vinyl coated aircraft cables on horizontal doors
- Bolt-on door hinges are concealed to complement chassis styling and add security
- Clip on door seal for extra protection against water leakage
- Fuel fill door is hinged automotive style
- Cutout in intermediate panel between horizontal and rear vertical compartments
- Lights include stop, tail, turn, marker and back up and complement the chassis styling
- Lock cylinders are keyed alike with double-bitted keys
- Primer is a high-grade automotive type
- Rear vertical doors are rearward opening and open a full 90 degrees
- Rotary door latches with stainless steel paddle handles and powder-coated steel pans
- Spring loaded vertical door holders hold door in open and closed positions
- Door latch strikers are adjustable, bolt on
- Tailgate (two point slam-locking) is removable and features locking rotary and anti-rack/rattle hardware.
- Undercoating beneath floor and wheelwells
- Standard shelving package
- Painted industry standards closest match possible
- Sign holders on both sides of body to have minimum 3” clearance
- Built in sign post holders on both sides with heavy-duty stops and tie offs
- Front and rear recessed strobe lights
- Lighted switch panel
- PV2000FC, 4000-watt power inverter
- Built in circuit breakers with two (2) 110 volt plugs installed in passenger side rear compartment

The Hook: An eight ton combination pimple and ball hitch, class 4 recesses hitch shall be mounted On the rear of the truck frame. The hitch shall measure approximately 23 inches from the \ ground to the center of the hook eye opening.

Trailer Outlet – An electrical outlet to accommodate a 7 (seven) prong trailer. Part # Pollak 11-720 with rubber boot # 11-761. Coupling must be installed near the pintle hook. Must be wired according to DOT standards.

Light Bar: Whelan Large Arrow Traffic Advisor Model LED TA1652L
Description: Sixteen 500 Series lamps, one piece, TACTRL3A control head, 48”
The light shall have Amber lenses in front and Red Lenses in back.
Security imprinting to be arranged with DOT prior to light bar installation.

Extra: 2 parts manuals
2 shop service manuals
2 lists of VIN numbers and light bar serial numbers
Mud flaps – front and rear
Written documentation on all warranties (including body)


Touch up paint
3 sets of keys
Hide away strobes in front parking lights and rear taillights
Tires must be mud and snow
Back-up Alarm – 107 Decibels

Undercoating Materials:

The truck shall be undercoated with a material which when applied at manufacturers Recommended dry film thickness, shall meet ASTM B-117 salt spray test for a minimum Of 2000 hours (Isolclad and Corashield/Coratub materials are acceptable). Finished Undercoating shall require no maintenance throughout the useful life of the truck.


Pollak # 11-721

7way Receptical

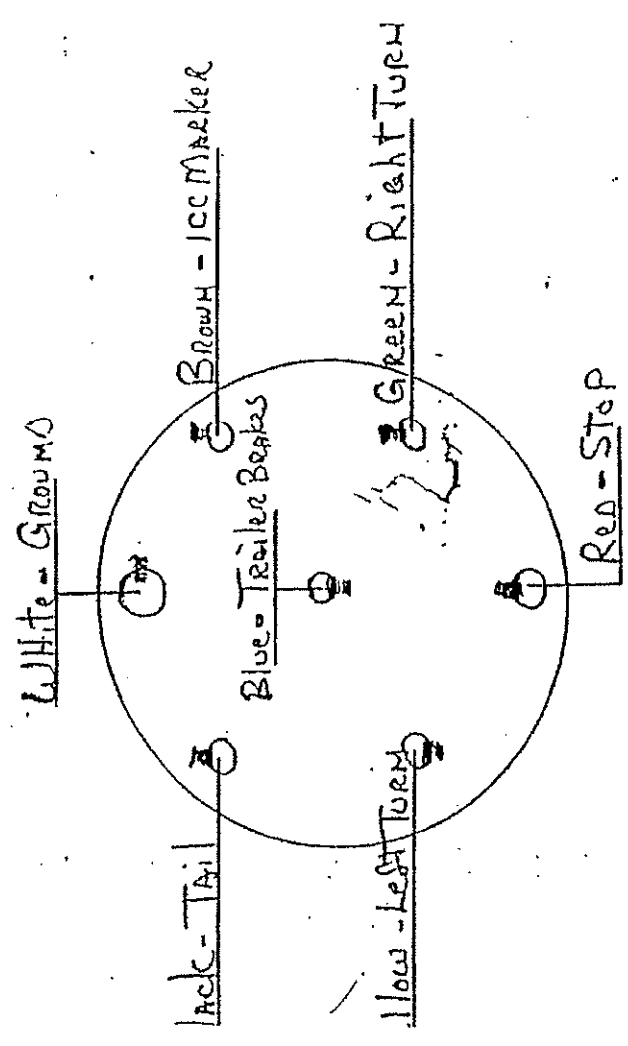

Wire Side

7way Cord End

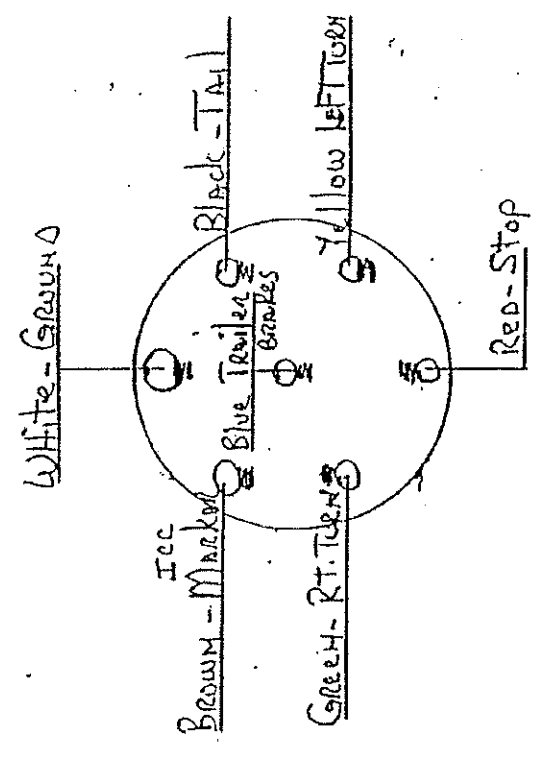

Wire Side